



**FIG. 7 APPLICATION OF STANDARD MAXIM SINGLE ARM OPERATOR  
(SILL MOUNT VERSION) (LOW PROFILE)**

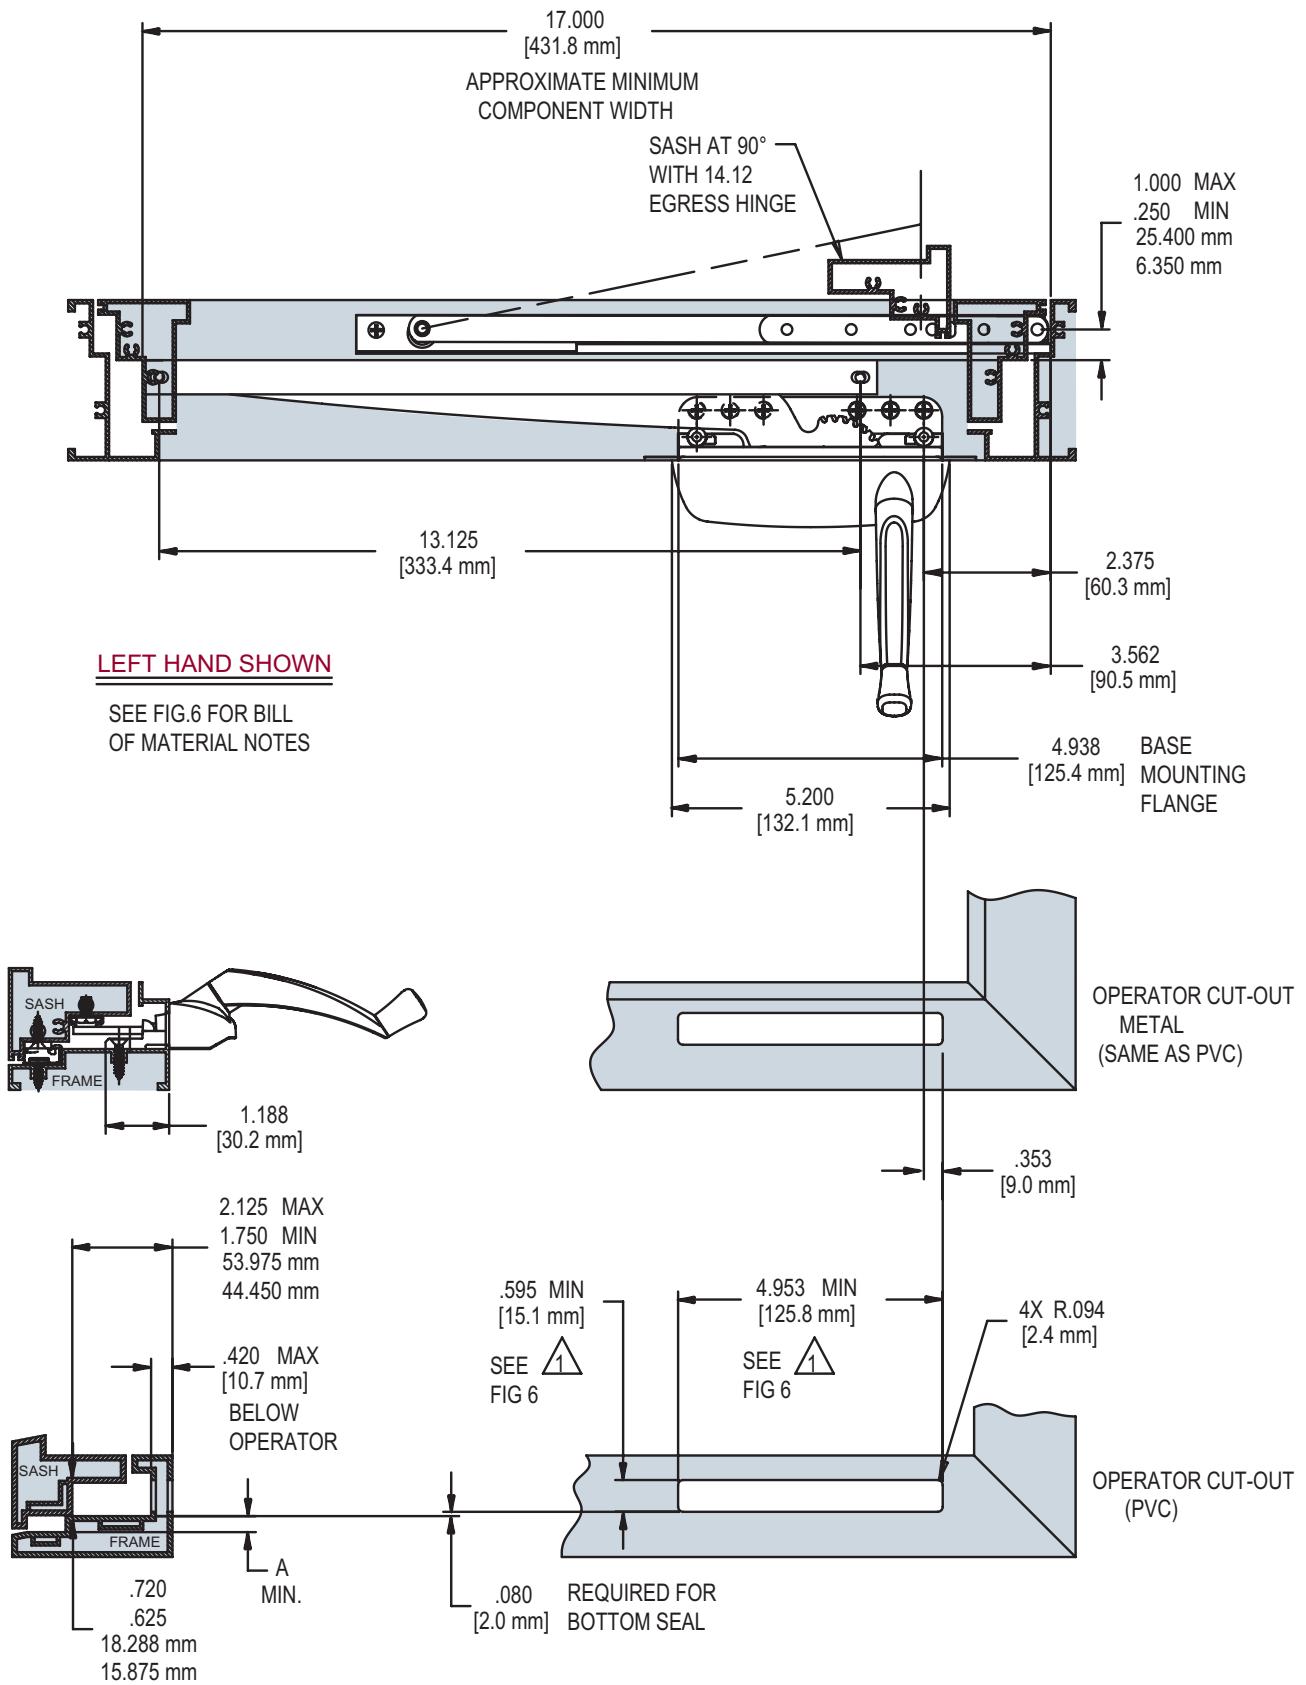

## MAXIM® SINGLE ARM OPERATORS (LOW PROFILE)

**FIG. 8 APPLICATION OF MAXIM SINGLE ARM OPERATOR (CONTINUED)  
(SILL MOUNT VERSION) (LOW PROFILE)**

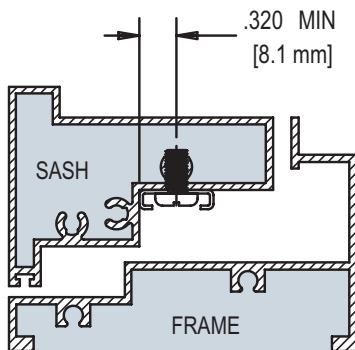

**30175**  
**TRACK PLACEMENT**

HARDWARE SHOWN FOR LEFT HAND WINDOW, SEE FIG.5	
PART NUMBER	DESCRIPTION
52.03.XX.011	SINGLE ARM OPERATOR
30175	TRACK
14.12.00.XXX	EGRESS HINGE
11454.XX	CONTOUR HANDLE
31882	GASKET

HINGE	"A"
14.12.00.XXX	.322 [8.2 mm]
OTHER 14 SERIES CASEMENT HINGES	.275 [7.0 mm]

NOTE:


 HOLD THIS DIMENSION AS CLOSE TO THE MINIMUM AS MANUFACTURING TOLERANCES ALLOW. A CLOSE FITTING CUT-OUT HELPS TO STABILIZE THE OPERATOR AGAINST ROCKING

2. GASKET 32658 IS REQUIRED ON PVC AND METAL PROFILES FOR AN IMPROVED AIR AND WATER SEAL

**FIG. 9 STANDARD MAXIM SINGLE ARM OPERATOR  
(SILL MOUNT VERSION) (LOW PROFILE)**

STAINLESS STEEL VERSION AVAILABLE

52.03.XX.011 LEFT HAND SHOWN

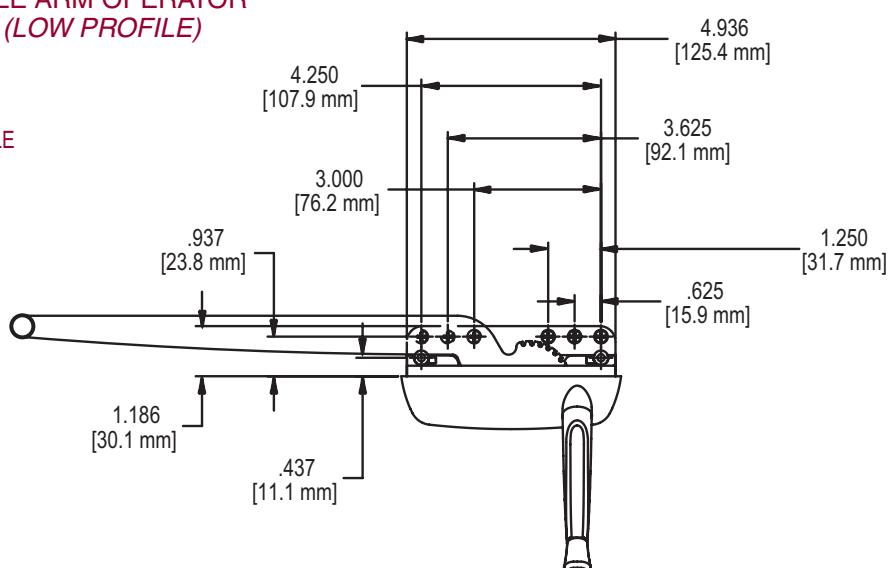


RECOMMENDED SCREWS:


(QTY 6)(PN 19240.XX)#8 X 1 FLAT  
HEAD SHEET METAL (SEE TRUTH  
TIPS FOR MORE INFORMATION)

(QTY 2) REAR MOUNT:#8-32 X 3/8 PAN HEAD  
MACHINE SCREW PN 19545.XX

**FIG. 10 MAXIM COVER 41212.XX/HANDLE 11329.XX(RH) (SHOWN)**

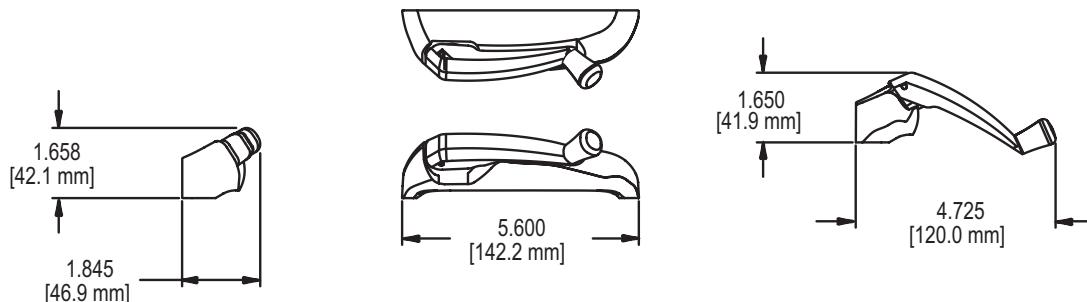

**FIG. 11 TRACK 30175**

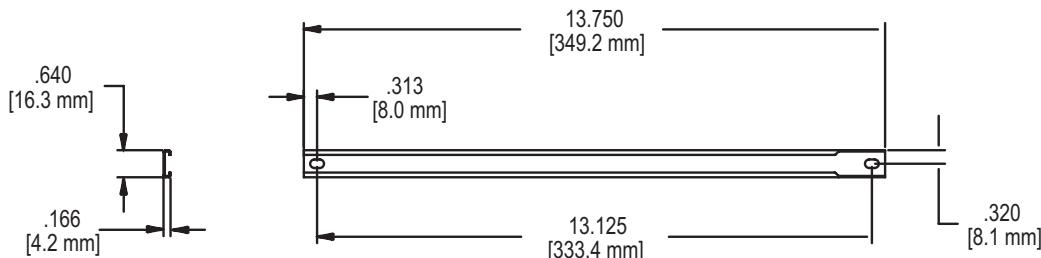

RECOMMENDED SCREWS:

(QTY 2)(PN 19214.XX)#8 X 1 FLAT  
HEAD SHEET METAL (SEE TRUTH  
TIPS FOR MORE INFORMATION)