
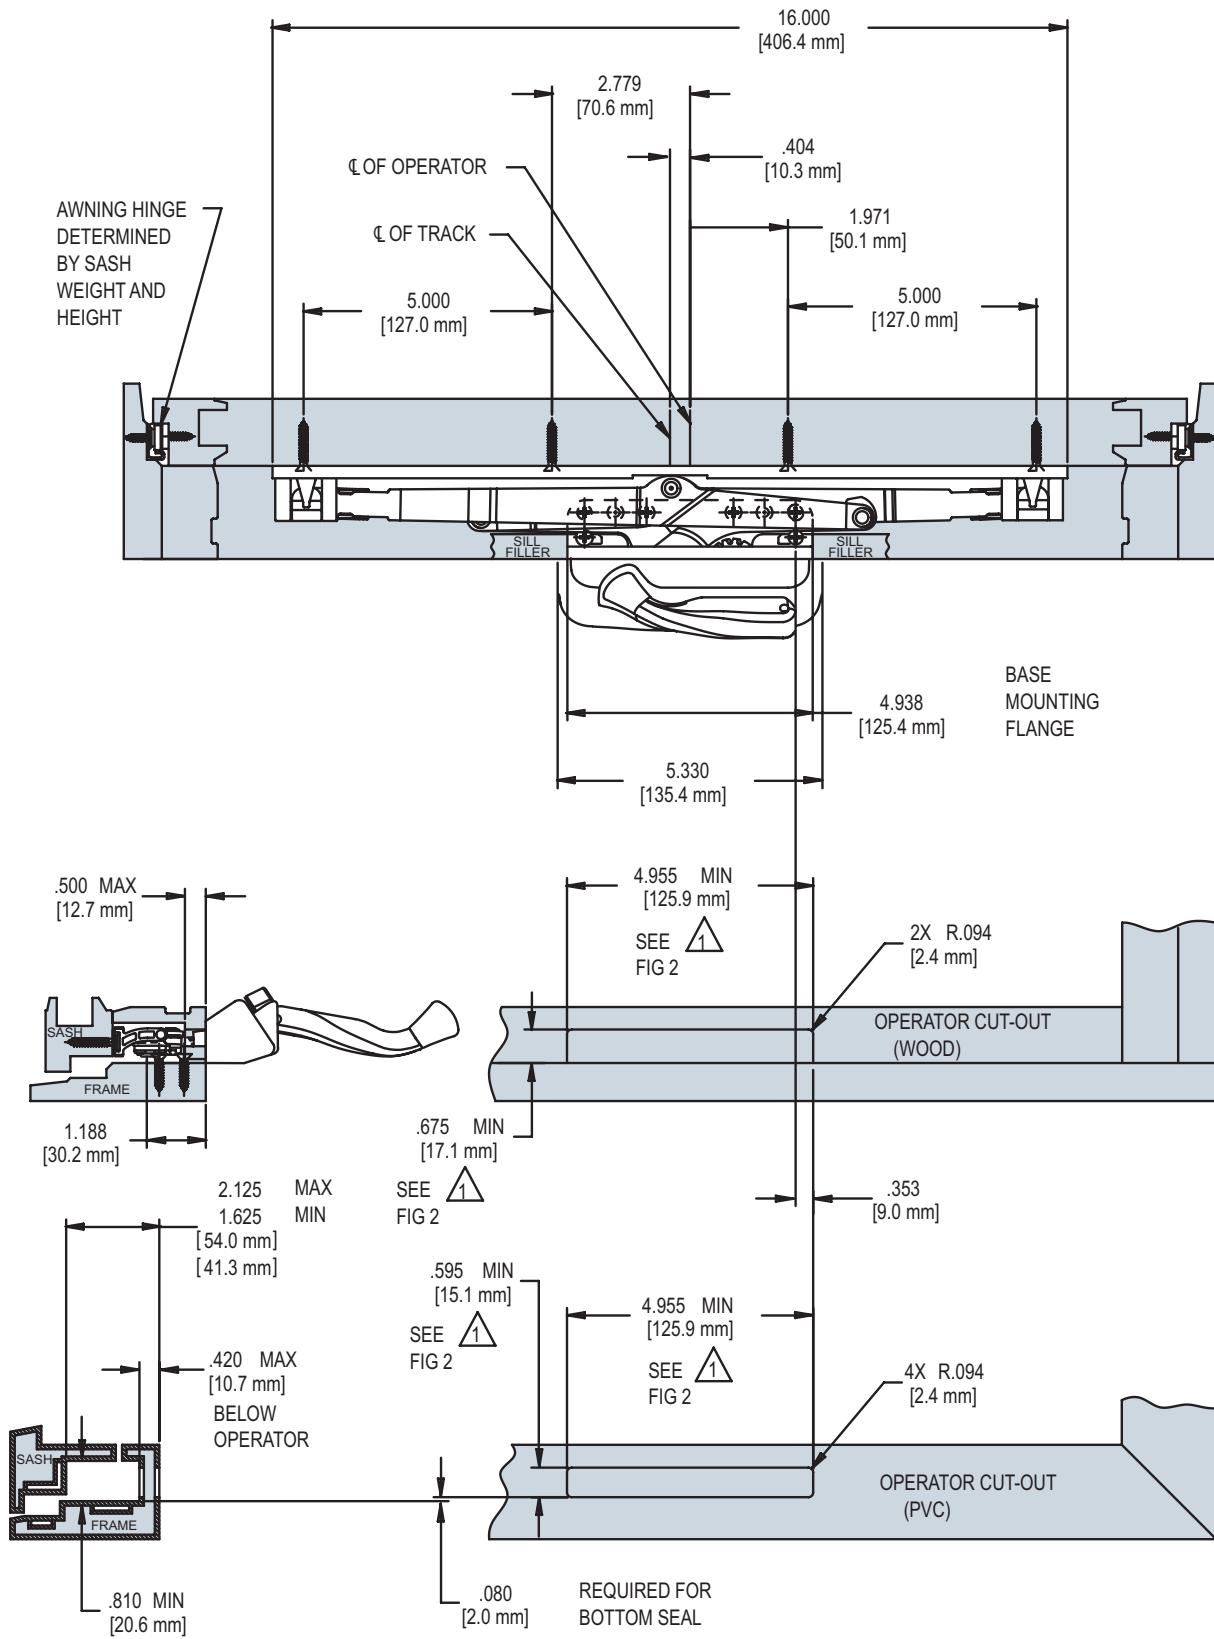


ENCORE™ AWNING OPERATOR (SILL MOUNT)

**FIG. 1 APPLICATION OF ENCORE AWNING OPERATOR
(SILL MOUNT VERSION)**



**FIG. 2 APPLICATION OF ENCORE AWNING OPERATOR CONTINUED
(SILL MOUNT VERSION)**

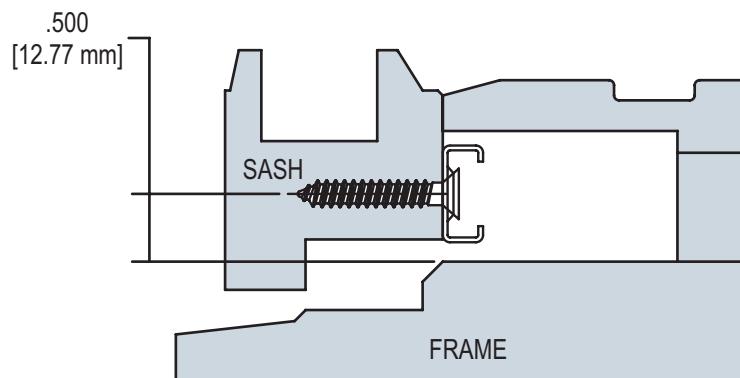

**11577.92
TRACK PLACEMENT**

HARDWARE SHOWN FOR LEFT HAND WINDOW, SEE FIG.1

PART NUMBER	DESCRIPTION
51.10.00.X11	AWNING OPERATOR
11577.XX	TRACK ASSEMBLY
13.XX.XX.XXX	HINGE
12614.XX	TANGO HANDLE/COVER PACK
32658	GASKET (PVC)

NOTE:

 HOLD THIS DIMENSION AS CLOSE TO THE MINIMUM AS MANUFACTURING TOLERANCES ALLOW. A CLOSE FITTING CUT-OUT HELPS TO STABILIZE THE OPERATOR AGAINST ROCKING

2. GASKET 32658 IS REQUIRED ON PVC AND METAL PROFILES FOR AN IMPROVED AIR AND WATER SEAL
3. ALL AWNING OPERATORS USE 12614.XX LEFT HAND TANGO HANDLE/COVER PACK

ENCORE™ AWNING OPERATOR (SILL MOUNT)

**FIG. 3 ENCORE AWNING OPERATOR
(SILL MOUNT VERSION)**

STAINLESS STEEL VERSION AVAILABLE

51.10.XX.011 SHOWN

51.12 REAR MOUNT VERSION
ALSO AVAILABLE

RECOMMENDED SCREWS:

(QTY 6)(PN 19240.XX)#8 X 1 FLAT HEAD SHEET
METAL SCREW (SEE TRUTH TIPS FOR MORE
INFORMATION)

(QTY 2) REAR MOUNT:#8-32 X 3/8 PAN HEAD MACHINE
SCREW PN 19545.XX

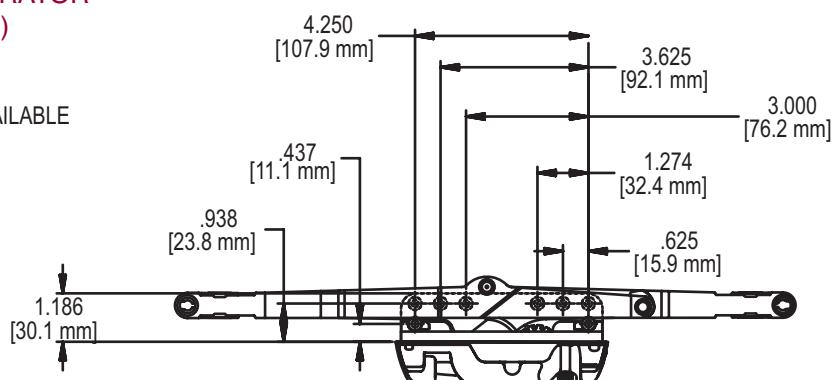


FIG. 4 ENCORE TANGO HANDLE/COVER 12614.XX(LH) (SHOWN), 12616.XX(RH)

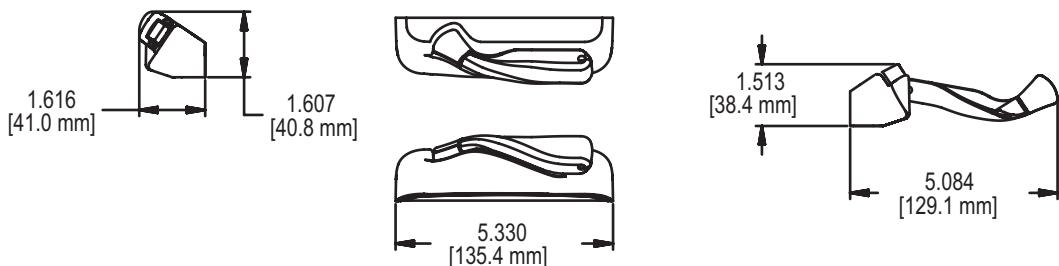


FIG. 5 BACK PLATE 21969.92

FOR USE WITH
51.12 REAR MOUNT
VERSION ONLY


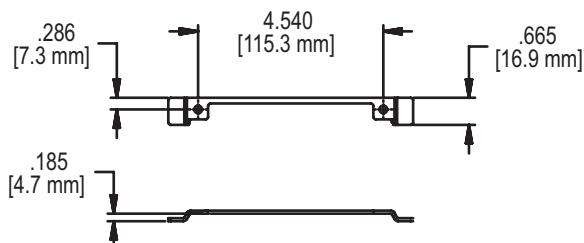


FIG. 6 ENCORE AWNING TRACK & SLIDER ASSEMBLY 11577.XX

STAINLESS STEEL VERSION AVAILABLE

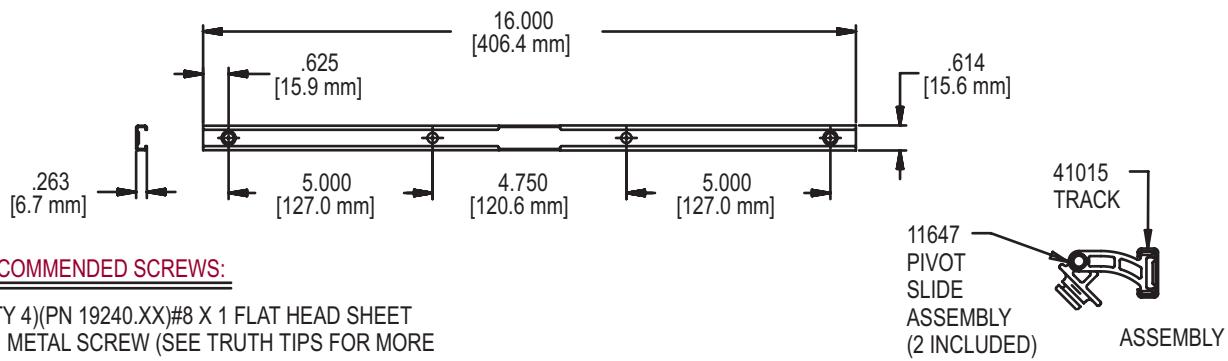

RECOMMENDED SCREWS:

(QTY 4)(PN 19240.XX)#8 X 1 FLAT HEAD SHEET
METAL SCREW (SEE TRUTH TIPS FOR MORE
INFORMATION)