

- Sleek, elegant, and easy to grasp, Truth's new handles are the latest addition to our line of sliding patio doors handles.
- The integrated design of the handle and escutcheon provides a clean and elegant aesthetic appearance for the homeowner.
- The #40.62 handle series is designed for use on mortise applications.
- These handles may be combined with Truth's outside pulls (#2939, #2940, and #2949) to achieve a differentiated appearance at various price points.
- All mortise kits that use outside pulls are supplied with anti-slide gaskets to help prevent against the outside pull slipping when operating the door.
- The handles were designed with an industry standard mounting hole pattern making them ideal for the OEM and retrofit markets.
- The handles are non-handed, which reduces part count and inventory.
- Outside pulls are available with cylinder locks for applications requiring keyed entry.

MORTISE APPLICATIONS:

- The #40.62 series handles are compatible with standard and extended reach single-point mortise locks.
- The #40.62 series handles were designed for use on wood, vinyl, or aluminum doors.
- The #40.62 series handles fit door widths (stile thickness) ranging from 0.50" to 2".
- The #40.62 series handles have mounting holes spacing of 3-15/16".

MATERIAL & FINISHES: Available in zinc die cast and painted. Paint finishes are electrostatically applied, durable coatings that provide excellent resistance to chipping, scratching and corrosion while maintaining color stability for years in direct sunlight. Please refer to Truth's Color Chart for examples of Truth's most popular finish options.



WARRANTY:

Protected under the terms of the Truth Warranty for Window and Door Manufacturers and Authorized Distributors. Refer to Truth's Terms & Conditions for further details.

ORDERING INFORMATION:

To customize the hardware package containing the specific items you require for your door system, please select from the following options:


1. Order non-handed #40.62 Handle.
2. Specify finish
3. Specify mounting screw length (see Fig. 1).
4. Select Mortise Lock item number (see Handleset Accessories Section - Mortise Lock options).
5. Select Keeper (see Handleset Accessories Section - Keeper options).
6. Select Outside Handleset (see Outside Pull Section)

TRUTH TIPS:

1. A Truth Hardware Secondary Patio Door Lock or Limiter can be added for applications requiring additional security.
2. Bumper guards (Truth item number 22082.XX), to keep door sash from contacting the opposite jamb during its travel, are highly recommended (See Handleset Accessories Section).
3. The use of frame adjusters (Jamb Jacks) is recommended for easy correction of out of square or racked door installations. Frame adjustment can improve both weather seal tightness and door operation over the life of the door.

40.62 SLIDING PATIO DOOR HANDLES


FIG. 1 40.62 HANDLE SET

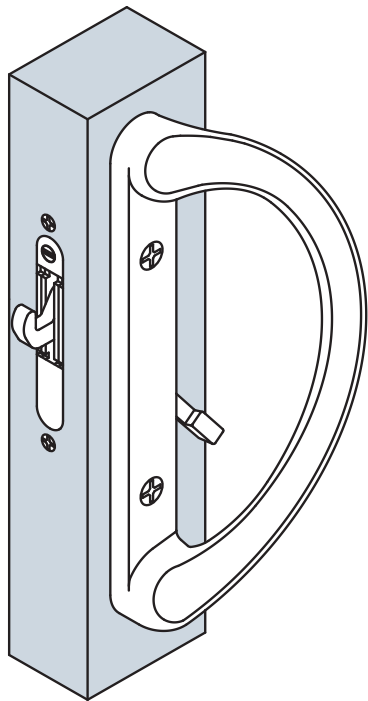

AVAILABLE MORTISE LOCKS
32435
32436
32461
32439

AVAILABLE OUTSIDE PULLS	
DESCRIPTION	PART NO.
2940 W/O CYL	32328.XX
2940 W CYL	32437.XX
2949 W/O CYL	32434.XX
2949 W CYL	32438.XX
2939 W/O CYL	32442.XX
2939 W CYL	32479.XX

.XX INDICATES FINISH

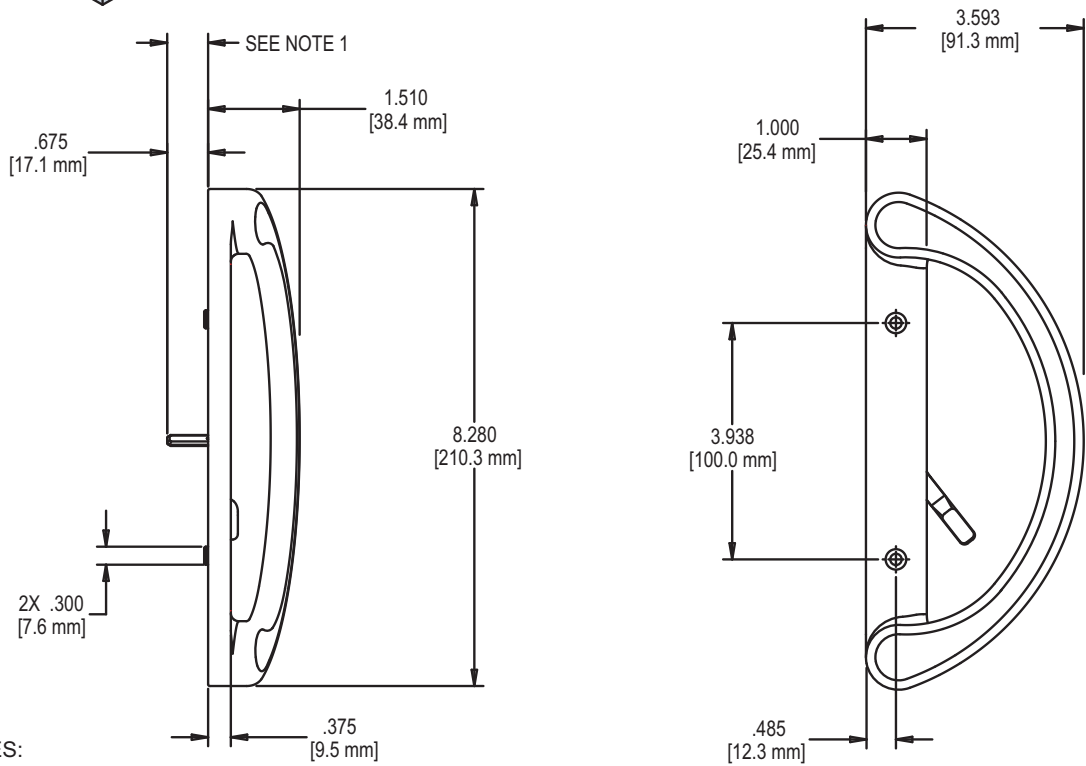

NOTES:

1. BLADE LENGTH = 1/2 DOOR THICKNESS (WILL VARY; FORMULA BASED ON CENTERED MORTISE LOCK WITH NO THERMAL BREAK.)
2. SCREW LENGTH = DOOR THICKNESS + .62 (15.8mm)