

**FIG. 1 APPLICATION OF STANDARD MAXIM SINGLE ARM OPERATOR
(SILL MOUNT VERSION)**


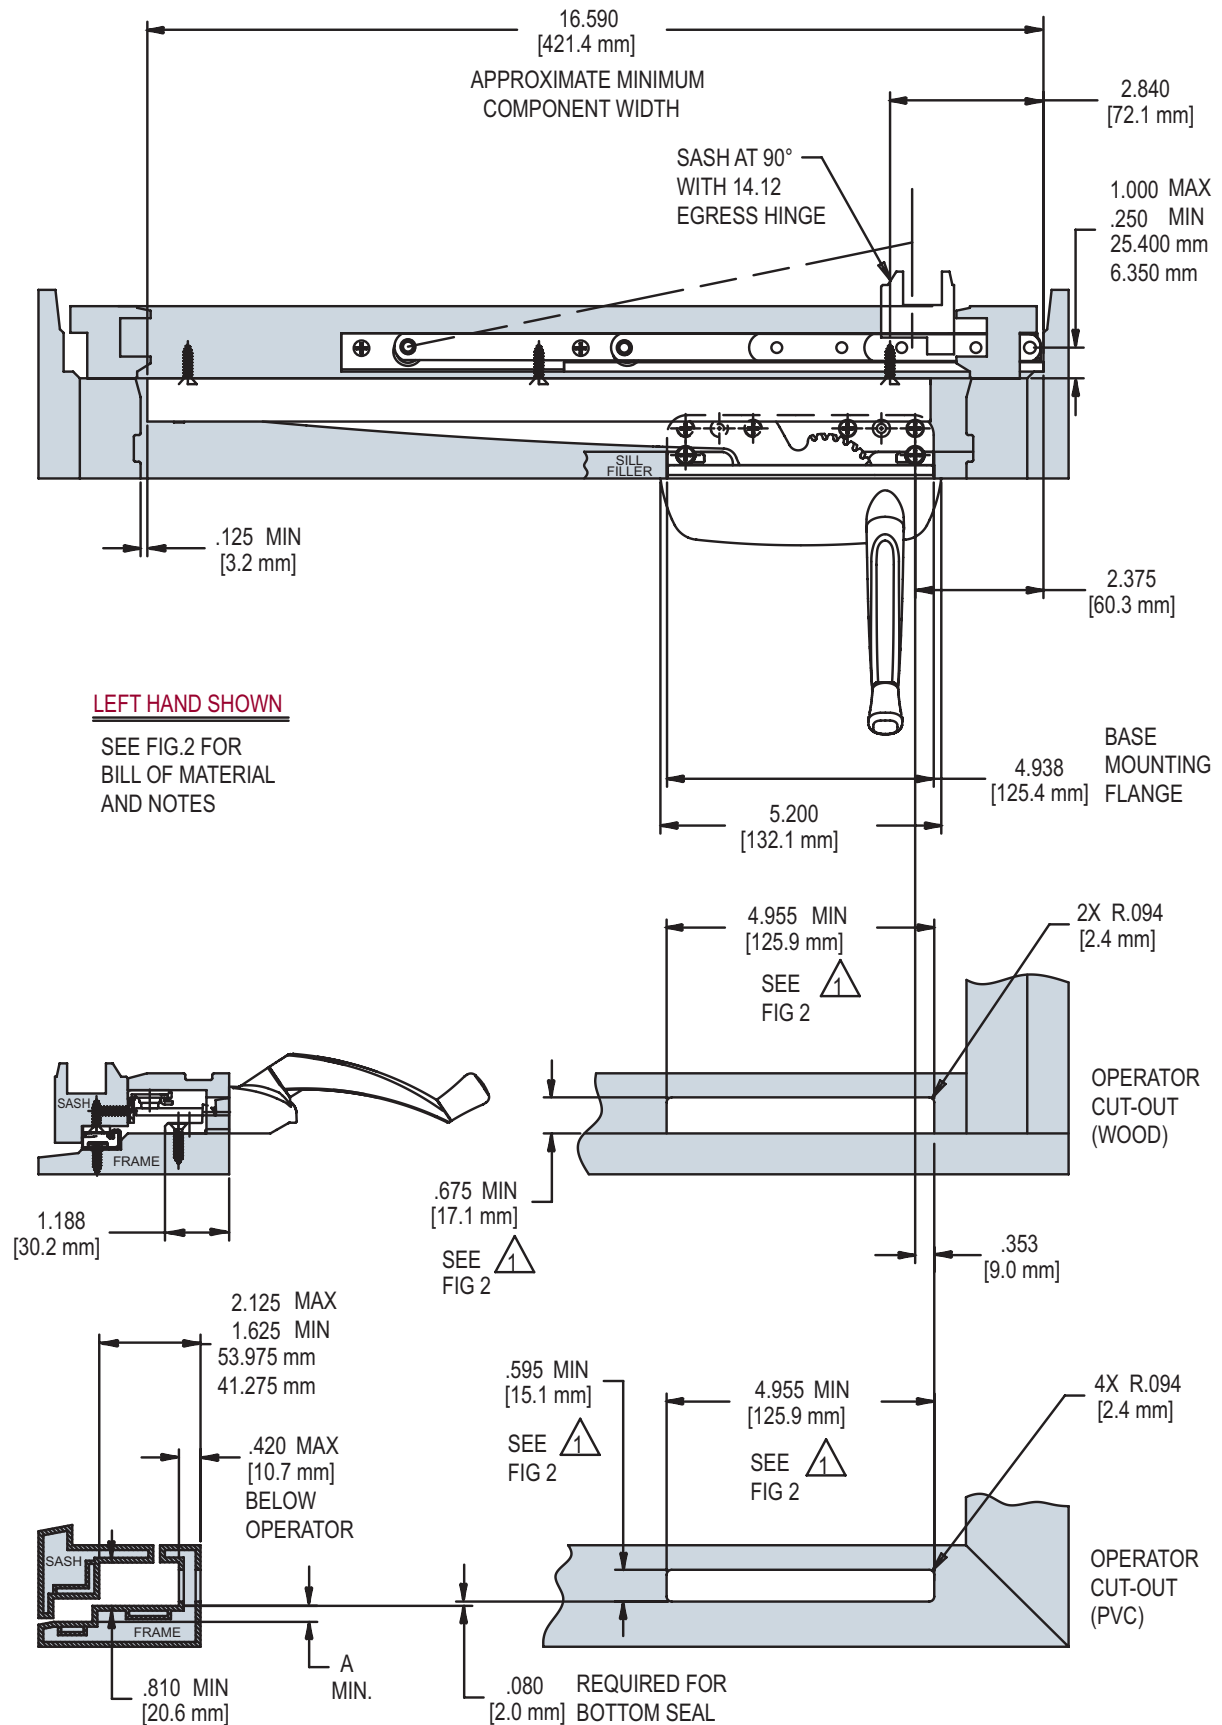


FIG. 2 APPLICATION OF MAXIM SINGLE ARM OPERATOR (CONTINUED)
(SILL MOUNT VERSION)

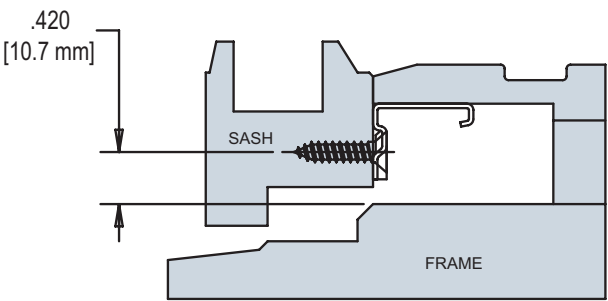


11576.XX
TRACK PLACEMENT

HARDWARE SHOWN FOR LEFT HAND WINDOW, SEE FIG.1	
PART NUMBER	DESCRIPTION
52.01.XX.XXX	SINGLE ARM OPERATOR
11576.XX	TRACK ASSEMBLY
14.12.00.XXX	EGRESS HINGE
11454.XX	CONTOUR HANDLE
31882	GASKET (PVC)

HINGE	"A"
14.97.00.XXX 14.12.00.XXX	.300 [7.6 mm]
OTHER 14 SERIES CASEMENT HINGES	.250 [6.4 mm]

- NOTE:
1. HOLD THIS DIMENSION AS CLOSE TO THE MINIMUM AS MANUFACTURING TOLERANCES ALLOW. A CLOSE FITTING CUT-OUT HELPS TO STABILIZE THE OPERATOR AGAINST ROCKING
 2. GASKET 32658 IS REQUIRED ON PVC AND METAL PROFILES FOR AN IMPROVED AIR AND WATER SEAL

**FIG. 3 STANDARD MAXIM SINGLE ARM OPERATOR
(SILL MOUNT VERSION)**

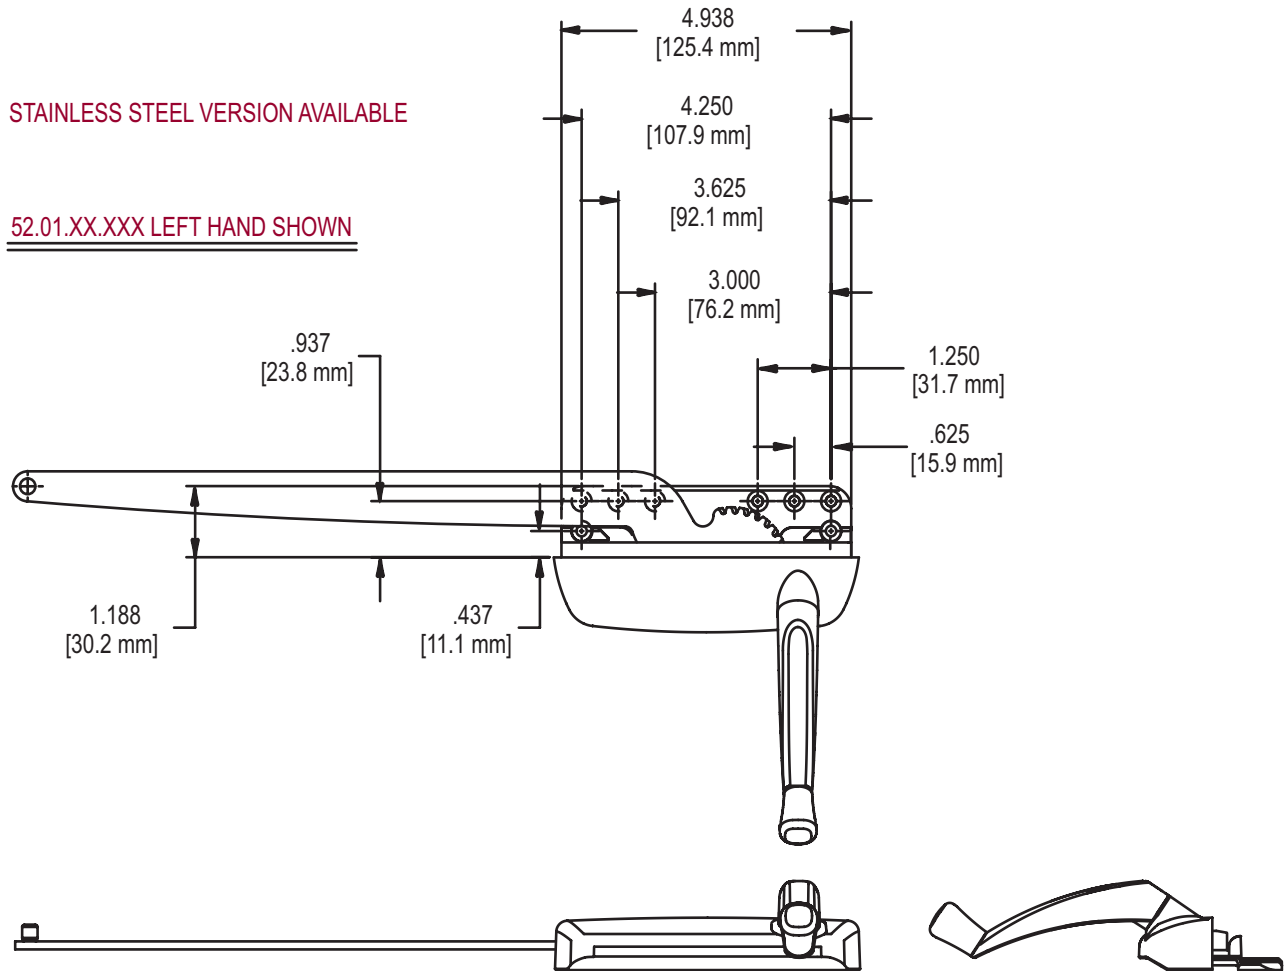


RECOMMENDED SCREWS:

(QTY 6)(PN 19240.XX) #8 X 1 FLAT HEAD SHEET METAL
SCREW (SEE TRUTH TIPS FOR MORE INFORMATION)

(QTY 2)FOR REAR MOUNT:#8-32 X 3/8 PAN HEAD MACHINE
SCREW PN 19545.XX

FIG. 4 MAXIM COVER 41211.XX /HANDLE 11329.XX(LH) (SHOWN)

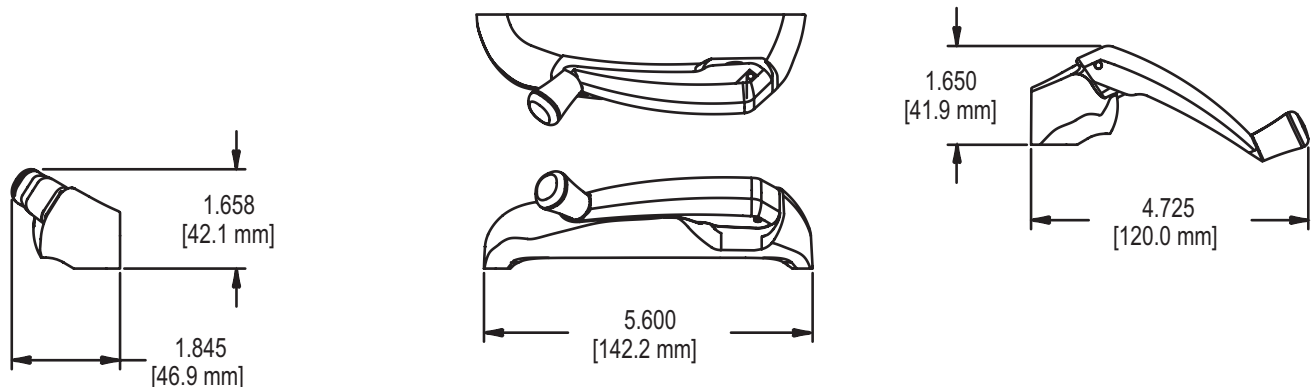

MAXIM® SINGLE ARM OPERATORS (SILL MOUNT)

FIG. 5 BACK PLATE 21969.92

FOR USE WITH
REAR MOUNT
VERSION ONLY


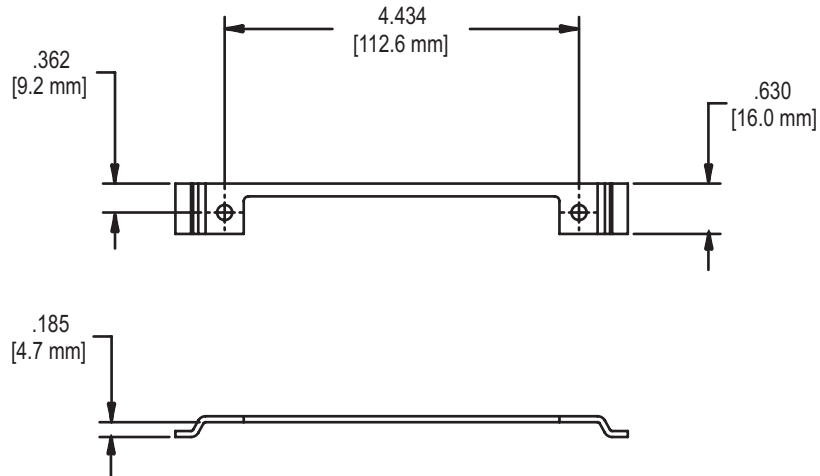


FIG. 6 TRACK & SLIDER ASSEMBLY 11576.XX

STAINLESS STEEL VERSION AVAILABLE

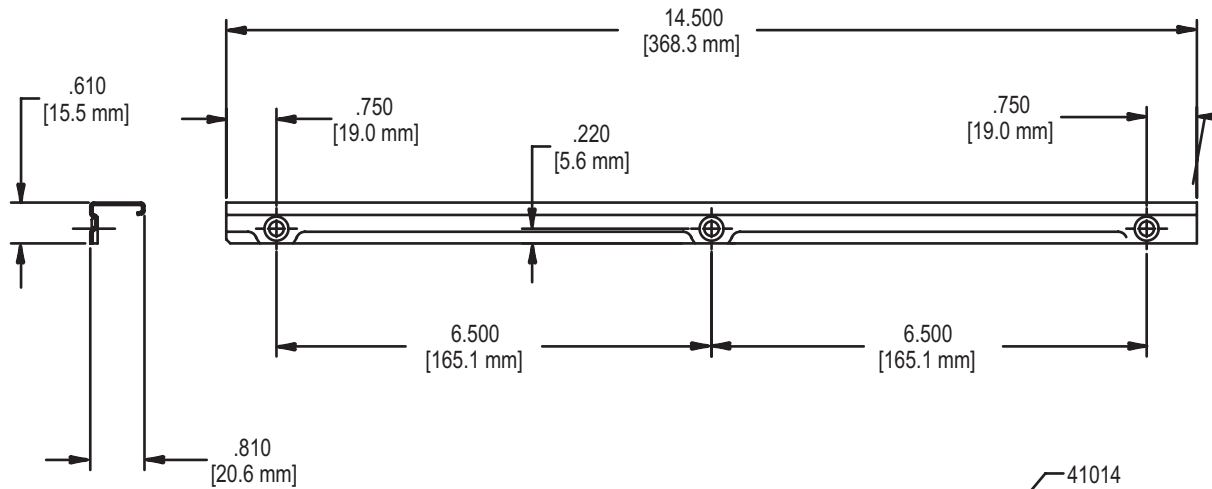

RECOMMENDED SCREWS:

(QTY 3)(PN 19240.XX) #8 X 1 FLAT HEAD SHEET METAL
SCREW (SEE TRUTH TIPS FOR MORE INFORMATION)

